


- (1).種類:交直流、三相馬達正逆轉、三相、單相 (4).I/O MODEL型:適用於各種I/O控制
 (2).S P型:適用於PCB焊接 (5).高壓型:負載輸出電壓可達480VAC,1200Vpeak
 (3).PANEL MOUNT型:適用於2點螺絲固定 (6).三相高壓型:可控制三相馬達及溫度,電壓可達480VAC

SOLID STATE VARIABLE RELAY		MINI TYPE			I/O Module X=1,2,4,8 port						
							DC→AC	DC→AC	DC→DC		
KR2010AX KR2015AX KR2025AX KR2040AX	KR2050AX KR2075AX KR2090AX	KR4010AX KR4015AX KR4025AX KR4040AX	KR4050AX KR4075AX KR4090AX	KS2002A DC→AC	KS4002A DC→AC	KS0602D DC→DC	I/O-X-KB DC→AC	I/O-X-KF DC→DC	KT20C08A KT20C12A KT20C16A	KT20R08A KT20R12A KT20R16A	KT1008D
VR500KΩ	VR1MΩ	3-32VDC			3-32VDC		3-32VDC	3-32VDC	3-32VDC		
		1VDC			1VDC		1VDC	1VDC	1VDC		
10A, 15A, 25A, 40A, 50A, 75A, 90A		2A			2A, 3A, 4A, 5A, 6A	2A, 4A	8A, 12A, 16A	8A, 12A, 16A	8A		
24-280VAC	48-480VAC	24-280 VAC	48-480 VAC	3-60VDC	24-280VAC	3-60 VDC	24-280VAC	24-280VAC	3-120VDC		
600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	80VDC	600V _{PEAK}	80VDC	600V _{PEAK}	600V _{PEAK}	300VDC		
相位控制 Phase Control		零點觸發 ZERO CROSS			電晶體 or MOSFET	零點觸發 ZERO CROSS	電晶體 or MOSFET	零點觸發 ZERO CROSS	隨機觸發 Random Switching	電晶體 or MOSFET	

K3P_C_DAI/AA: ZERO CROSS 零點觸發								3 PHASE SOLID STATE RELAY 三相固態繼電器		3 PHASE SOLID STATE REVERSING RELAY 三相馬達正逆轉固態繼電器	
K3P_R_DAI/AA: Rndom Switching 隨機觸發										DC→AC	
K3P20C25DA	K3P40C25DA	K3P20C25AA	K3P40C25AA	K3P20C25DA-2L	K3P40C25DA-2L	K3P20C25DA-2L	K3P40C25DA-2L	K2R480C1DA	K2R480C1AA		
K3P20C125DA	K3P40C125DA	K3P20C125AA	K3P40C125AA	K3P20C125DA-2L	K3P40C125DA-2L	K3P20C125DA-2L	K3P40C125DA-2L	K2R480C7DA	K2R480C7AA		
6-32VDC	12-32VDC	80-280VAC	80-280VAC	5-32VDC	10-32VDC	80-280VAC	80-280VAC	10~50VDC	80-280VAC		
3.0VDC	3.0VDC	10 VAC	10 VAC	3.0VDC	3.0VDC	10 VAC	10 VAC	2.0VDC	10 VAC		
25A, 40A, 50A, 75A, 90A, 100A, 125A								1HP (0.75kW)		4HP (3.0 kW)	
								2HP (1.5 kW)		5HP (4.0 kW)	
								3HP (2.2 kW)		7.5HP (5.5 kW)	
24-280VAC	48-480VAC	24-280VAC	48-480VAC	24-280VAC	48-480VAC	24-280VAC	48-480VAC	48-480VAC			
600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	1200 Vrms			
零點觸發 ZERO CROSS				隨機觸發 Random Switching				零點觸發 ZERO CROSS			

外觀尺寸圖 (unit:mm)

KC/KD/KG/KL/KN/KR Series

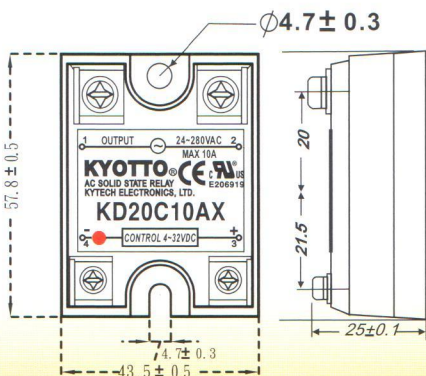

3 PHASE Series

