


Zero ohm Resistor

FEATURES

- Industry's lowest cost
- Excellent long term stability
- Used in all kinds of application
- **Max value: 0.008 Ω**
- Operating Temperature : -55°C ~+125°C
- Body Color: yellow-brown (biege)
- one black band
- **Flameproof coating available (As FCR type)**

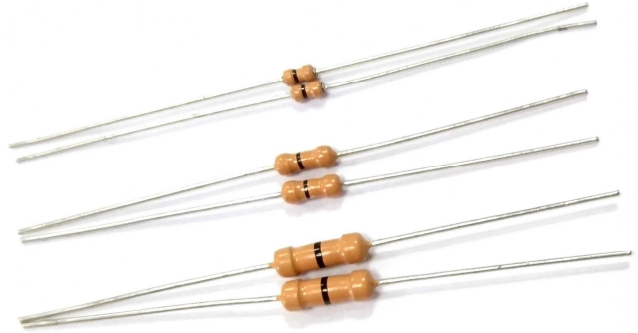


MATERIAL

- Core: High Purity Ceramic Al₂O₃
- Termination: Standard solder-plated copper lead
- Coating: Epoxy (FCR is grey silicone)



GENERAL SPECIFICATION

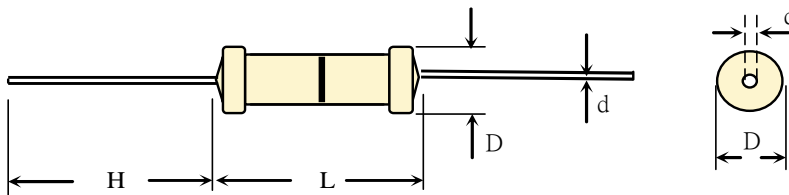

TYPE	DIMENSION (mm)				POWER
	L	D	H	d	
(F)CR 1/8W	3.2±0.2	1.6±0.2	27 ±3.0	0.45± 0.05	1/8W
(F)CR 1/4W	6.0±0.5	2.3±0.3	27 ±3.0	0.55± 0.05	1/4W
(F)CR 1/2W	9.0±0.5	3.0±0.5	27 ±3.0	0.59±0.05	1/2W

HOW TO ORDER :

Type	Resistance Value	Package
CR1/8W	0 Ω	B=axail bulk
CR1/4W		T= tape/box
CR1/2W		R=tape reel